



**Elevate Your Projects with  
Affordable, Direct-from-  
Factory Solutions**





Synchronized Texture

OAK NATURAL  
18J65343-1

## SPC / Luxury Vinyl Plank

**Excepcional Durability:** Engineered to endure the most demanding conditions, SPC flooring is water-resistant, scratch-resistant, and perfect for high-traffic areas. It's an ideal choice for homes with children and pets, ensuring long-lasting beauty and functionality.

**Elegant Design:** Our extensive collection features a variety of classic wood tones, contemporary greys, and sophisticated patterns that replicate the natural beauty of hardwood and stone, adding a touch of elegance to any environment.

**Enhanced Comfort and Acoustic Performance:** Experience quieter, more comfortable spaces with our built-in underlayment that provides excellent sound insulation and cushioning underfoot.

**Effortless Installation:** The innovative click-lock system allows for quick and easy installation, whether you are a DIY enthusiast or employing professional services. At Selva, we are committed to sustainability. Our SPC flooring is manufactured using environmentally responsible materials and processes, contributing to a healthier planet.

**Low Maintenance:** Enjoy the convenience of minimal upkeep with our SPC flooring, allowing you more time to appreciate your beautifully enhanced space.

## Size Recommended

Wearlayer: 12Mil, 20Mil, 22 Mil

Plank Size: 7"X48", 9"X60"


Core Thickness: 4.5mm, 5.5mm, 6mm

Pad Thickness: 1mm, 1.5mm



MAPLE  
6804-7



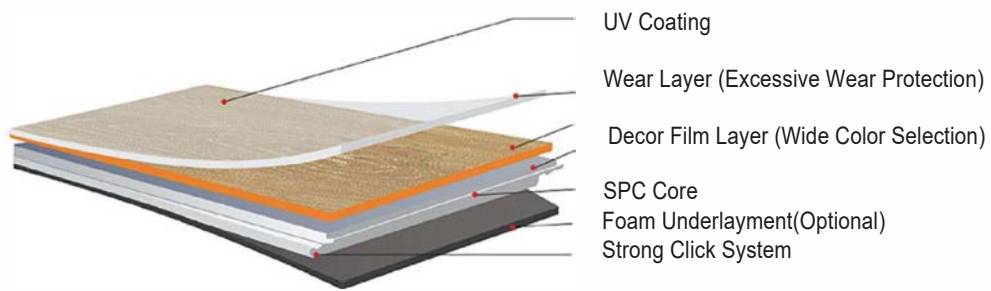





■ 6806-1



■ 6806-2



■ 6806-3



■ 6806-4



■ 6806-5



■ 6806-6



■ 6806-7



■ 6806-8



## More Film Colors



■ 18P00311



■ 15XL80101



■ 15XL80202



■ 15XL80406



■ 15XL80601



■ 15XL80703



■ 15A52001



■ 15C02702



■ 15Y14801



■ 15A52201



■ 15Y15201



■ 15B01901



■ 15B01802



■ 15A51901



■ 15XL80302



■ 15XL80502





What  
makes

## Glue Down Vinyl Floor

Glue Down Vinyl is a waterproof hard surface floor that has the look and feel of hardwood. It is very affordable and extremely resistant to foot traffic, pets, and everyday household use.

Not limited to just flooring applications. You are free to design spaces utilizing our products on walls, ceilings, and pillars.

Compared to Click Vinyl Flooring, glue down is easy to repair and replace. If one plank or tile is faulty, you only need to replace or repair that one, without removing the neighboring planks.







■ 6806-1



■ 6806-2



■ 6806-3




■ 6806-4



■ 6806-5



■ 6806-6

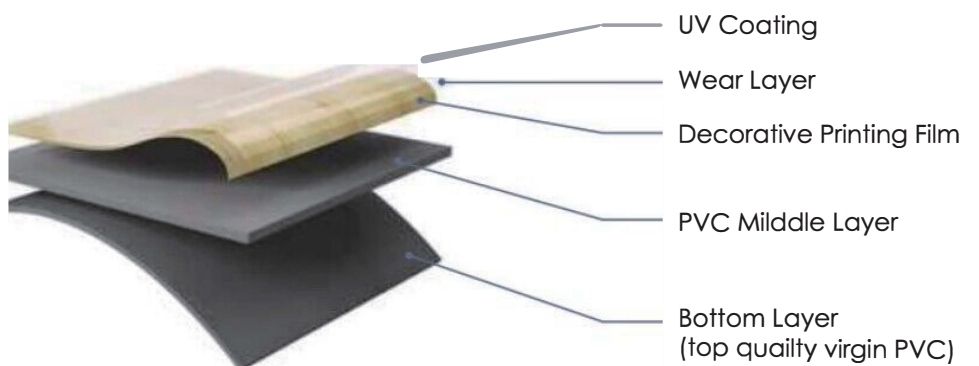





## Size Recommended

Wearlayer: 12Mil, 20Mil

S Plank: 4"X36", 4"X48"

M Plank: 6"X48", 7"X48", 9"X48"

L Plank: 9"X60", 9"X70"

Herringbone Plank: 4"X20", 4"X24", 4.4"X22", 4.4"X26.4", 5"X25"



Formaldehyde  
Emission



Heavy Domestic



100%  
Water-resistant



Schwer  
Entflammbare



Where and How



A guarantee  
lasting for a lifetime



OAK  
15U040

# IWF

(Inorganic Waterproof Flooring)


If there is a floor that doesn't compromise your customer's vision, it must be IWF.



IWF flooring features an inorganic cement composite core made from proprietary, cell-based silica vegetable fibers. This unique core provides IWF with superior dimensional stability, even when subjected to heat and temperature variations. IWF can be installed in large areas without expansion gaps (up to 10,000 ft<sup>2</sup>/1,000 m<sup>2</sup> or 100 ft/32 m in any direction). The 3-mil melamine commercial-grade overlay protects your flooring from scratches, scores, indentations, and stains, ensuring long-term beauty. Additionally, being waterproof and PVC-free, IWF flooring promotes a healthier environment for your family.





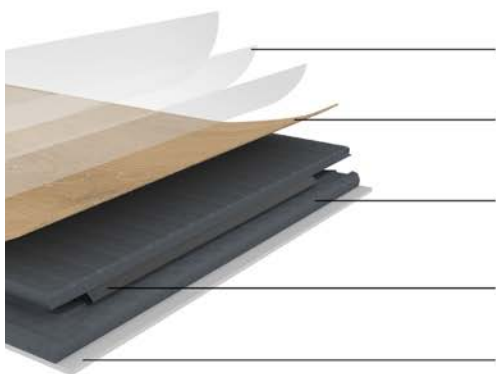

#### **Liquid Overlay**

(Antisepsis, Stain-resistant, Anti-slip, Scratch-resistant, Wear-resistant)

#### **Decor Paper**

(A variety of decor color and matching embossing finish)

#### **IWF Substrate**

Inorganic Waterproof Fiberboard (Ultra strong stability, wood fiber included, waterproof Fire-resistant class A, Low formaldehyde, Degradable)

#### **5G TapFit Joint System**

Easiest and Strongest Interlocking System

#### **Balance Paper**

(Providing balance on dimensional stability, Moisture-resistant) (Providing balance on dimensional stability, Moisture-resistant)



## ■ 100% PVC & plasticizer-free

An eco-friendly, PVC and plasticizer-free wooden flooring solution with waterproof features. Show your love for the environment with this sustainable choice, ensuring a healthier home and planet.

## ■ 100% Waterproof

IWF takes pride in its exceptional waterproof quality, a feature that sets it apart from competitors. Whether it's a wooden sauna hut or a humid riverside house, moisture is no longer a concern.

## ■ An A-class fire & smoke resistant level

IWF, the new generation in the flooring family, boasts a striking A-class smoke and fire rating, outperforming most of its wooden counterparts.

## ■ Install over 10,000ft²/1,000m² without transitions

IWF is impervious to heat, temperature variations, and mildew, allowing it to be installed in large areas without transitions (up to 10,000 ft²/1,000 m² or 100 ft/32 m in any direction).

## ■ Ultra-scratch resistant

The liquid overlay provides superior scratch and stain resistance compared to industry-leading rigid coatings, making it the ideal choice for pet owners. Its soft and warm underfoot feel, combined with a super anti-scratch surface, creates a pet-friendly indoor space perfect for animal lovers.

## ■ Floating installation system

2G/5G click locking system of IWF makes it more time-saving and cost-effective compare to traditional flooring.

What  
makes

IWF  
Special

# Black Core

A worry-free choice for kids to play on.

Super water resistant organic **rigid core flooring**. Ultra water-resistant organic rigid core flooring



As a leader in the innovative flooring industry, Selva draws design inspirations from around the globe and across the color spectrum to offer floors with dramatic variety and universal beauty. At the heart of this innovation is Black Core, a flooring solution that combines aesthetic appeal with unparalleled versatility. The unique profile seal, advanced surface treatment, and swell-resistant HDF core make Black Core not only resistant to moisture, scratches, and stains, but also adaptable to subfloor imperfections, indentations, and telegraphing.





# What makes

## Black Core Special

### ■ A breakthrough of stability

Featuring a high-density core, Black Core offers superior water resistance and is 55% more stable compared to traditional standard laminate.

### ■ Profile Coating

The non-ionic high polymer sealer, utilizing nanometer particles, penetrates all edges of your flooring to provide comprehensive moisture protection.


### ■ A time-saving Large Installation Area

Dimensional stability makes it possible to be installed over 1,000 sqft/100m<sup>2</sup> without transition.

### ■ Waterproof Surface Shield

Black Core, crafted from natural wood fiber combined with melamine resin and paraffin wax, offers a worry-free solution capable of withstanding daily challenges such as pet activity, juice spills, and even alcohol-based hand sanitizers.

OAK  
15H01404

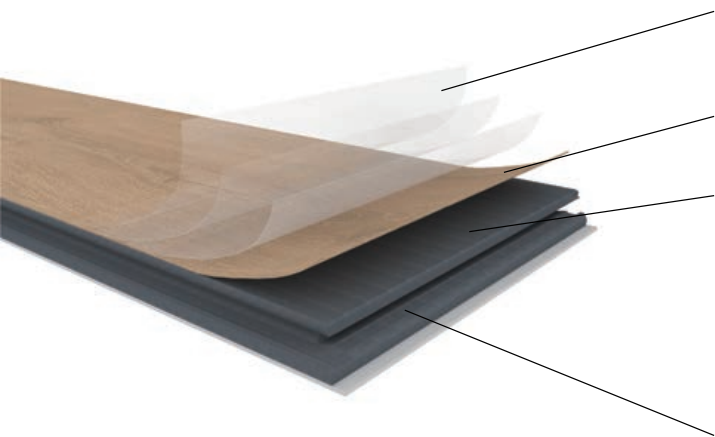

### Liquid Overlay

- contributes to a tremendous level of realism compared to standard laminate.
- Anti-sepsis, Anti-slip, Stain-resistant, Scratch-resistant, Wear-resistant.

### Decor Paper

- Designer-inspired digital-printed visuals create a true-to-nature appearance.

### Water Resistant Substrate

- Impact resistance.
- A more substrate feel.
- Optimum in sound absorption.
- Low indentation from heels and furniture legs.
- Prevents telegraphing of minor subfloor imperfections.
- Superior Dimensional stability with exclusive composition.
- Prevents telegraphing of minor subfloor imperfections.

### Thickness

- 5mm, 6mm, 8mm, 10mm, 12mm.

Key technical indicators:

Density: 880-900kg/m<sup>3</sup>

Water absorbent rate: 8%-10%



OAK  
15H00902



Flooring Type	IWF Flooring	SPC Flooring	Black Core
	Melamine face + IWF core	Plastic film + SPC core	Melamine face + HDF core
Density	1450 kgs/m³	2050 kgs/m³	880-900 kgs/m³
Waterproof	V	V	X
thickness swell	<3%	0	5-8%
Formaldehyde Emission	<E0	Free	E1, E0
Degradable	PVC free	X	PVC free
Fire-resistant Rating	A class	B1 class	B1 class
Wear Resistance	V	V	V
Scratch Resistance	V	X	V
Stain Resistance	V	V	V
Cigarette Resistance	V	X	V
Moisture Mopping	V	V	X
Installation Area without Transition	1,000 m² (32mx32m)	200 m² (10mx20m)	80 m² (8mx10m)
Stability to Sunlight and Heat	V	X	V
Rigidness to Subfloor Imperfections	V	X	V
Suitable for above, on And under Ground	V	V	X
Suitable Thickness	8mm	4-8mm	8-12mm

## More Paper Colors



12D00401



15B27001



15D28806



15H05101



15X05201



15H00904



15H00701



24D69203



15H01401



15H01101



24H03605



24H01801



24H03702



24H04901



24H04804





24H04401







## SPC Floor Molding & Trims

- Matching for SPC/LVT/WPC flooring thickness 4mm-7.5mm



	<b>T-MOLDING</b>
	Size(mm): 2400*45*7
	Packing: 20pcs/ctn
	Price:
	Weight: 10KGS
	



	<b>REDUCER</b>
	Size(mm): 2400*43*10
	Packing: 20pcs/ctn
	Price:
	Weight: 13.6KGS
	



	<b>END-CAP</b>
	Size(mm): 2400*35*10
	Packing: 20pcs/ctn
	Price:
	Weight: 13.4KGS
	



	<b>QUARTER ROUND</b>
	Size(mm): 2400*28*16
	Packing: 25pcs/ctn
	Price:
	Weight: 16.26KGS
	



	<b>STAIR NOSE</b>
	Size(mm): 2400*54*18
	Packing: 10pcs/ctn
	Price:
	Weight: 11KGS
	



	<b>FLUSH STAIRNOSE 72</b>
	Size(mm): 2400*72*25
	Packing: 10pcs/ctn
	Price:
	Weight: 15KGS
	


	<b>FLUSH STAIRNOSE 115</b>
	Size(mm): 2400*115*24
	Packing: 6pcs/ctn
	Price:
	Weight: 16.5KGS
	

	<b>FLUSH STAIRNOSE 131</b>
	Size(mm): 2400*131*25
	Packing: 6pcs/ctn
	Price:
	Weight: 17.6KGS
	

	<b>SKIRTING 80-1</b>
	Size(mm): 2400*80*14
	Packing: 10pcs/ctn
	Price:
	Weight: 12.05KGS
	

	<b>SKIRTING 90-1</b>
	Size(mm): 2400*90*15
	Packing: 10pcs/ctn
	Price:
	Weight: 14.5KGS
	

	<b>L END CAP</b>
	Size(mm): 2400*25*7
	Packing: 50pcs/ctn
	Price:
	Weight: 18KGS
	

	<b>UNDERLAYMENT</b>
	Size: 16.9m x 1.1m x 1.5mm
	Underlayment (EVA/IXPE) is placed underneath the flooring to provide comfort underfoot and to provide insulation against sound, moisture and heat.



## Company Profile

Selva Builders Supply's parent company, established in 2008 and headquartered in Qingdao, China, is a leading force in the construction supply industry. The Group operates seven factories across China, Peru, and Africa, spanning 600,000 square meters and employing over 2,000 people. Specializing in the production and sale of MDF, particle board, flooring, and other highly processed panel products. The Group is committed to delivering top-quality construction materials.

### Advanced Technology and Sustainability

Equipped with state-of-the-art flooring, cabinets and panel board production machinery, the Group ensures robust production capacity and high-quality outputs. Embracing circular economic development models, the Group leverages advanced technology to uphold sustainable concepts.

### Mission and Global Reach

With a mission to enhance human life through superior talent and products, the Group is dedicated to shaping a better future. Its products are distributed to over 40 countries and regions, including the Americas, Europe, the Middle East, Africa, and Asia. Continuous improvement and innovation in management, design, and production processes are at the core of the Group's philosophy.

### Certifications and Vision

The Group has achieved significant certifications, including Floorscore, CE, UKCA, and QES system certifications, reflecting its commitment to quality and excellence. Adhering to the belief in building a world-renowned brand, the Group strives to become a competitive and influential international company in the industry.

**Email:** [info@selvabs.com](mailto:info@selvabs.com)

**Phone:** +1 818 479 0377 (WhatsApp/USA)

**Website:** [www.selvabs.com](http://www.selvabs.com)